

## BEIJER X2 BASE/X2 PRO COMPATIBILITY DATASHEET

### Product Overview:

**Product Name:** Beijer X2 Base & X2 Pro HMI Touch Panels  
**Enclosure Compatibility:** TECHNOMET-CONTROL

#### These enclosures fit the Beijer models:

- X2 base 5 v2, X2 base 7 v2, X2 base 10 v2
- X2 pro 4, X2 pro 7, X2 pro 10, X2 pro 12.


This table identifies which size Beijer display fits into each TECHNOMET-CONTROL enclosure.



Part Number	Enclosure Size (W x H x D)	Enclosure Model	Compatible Beijer Model
<b>M70 23 002</b>	230 x 180 x 95 mm	C218V	X2 base 5 v2, X2 Pro 4
<b>M70 23 006</b>	230 x 180 x 95 mm	C218V	X2 base 5 v2, X2 Pro 4
<b>M70 36 102</b>	360 x 250 x 95 mm	C325V	X2 base 5/7/10 v2, X2 Pro 4/7/10
<b>M70 36 106</b>	360 x 250 x 95 mm	C325V	X2 base 5/7/10 v2, X2 Pro 4/7/10
<b>M70 36 402</b>	360 x 360 x 95 mm	C336V	X2 base 5/7/10 v2, X2 Pro 4/7/10
<b>M70 36 406</b>	360 x 360 x 95 mm	C336V	X2 base 5/7/10 v2, X2 Pro 4/7/10
<b>M70 42 202</b>	420 x 300 x 95 mm	C430V	X2 base 5/7/10 v2, X2 Pro 4/7/10/12
<b>M70 42 206</b>	420 x 300 x 95 mm	C430V	X2 base 5/7/10 v2, X2 Pro 4/7/10/12

TECHNOMET-CONTROL front panel cut out details for fitting Beijer displays.

Beijer Model	Enclosure Model	A (mm)	B (mm)
<b>X2 base 5 v2</b>	C218V, C325V	161	93
<b>X2 base 7 v2</b>	C325V, C336V, C430V	186	136
<b>X2 base 10 v2</b>	C325V, C336V, C430V	275	177
<b>X2 pro 4</b>	C218V, C325V	130	89
<b>X2 pro 7</b>	C325V, C336V, C430V	189	128
<b>X2 pro 10</b>	C325V, C336V, C430V	275	177
<b>X2 pro 12</b>	C430V	324	226

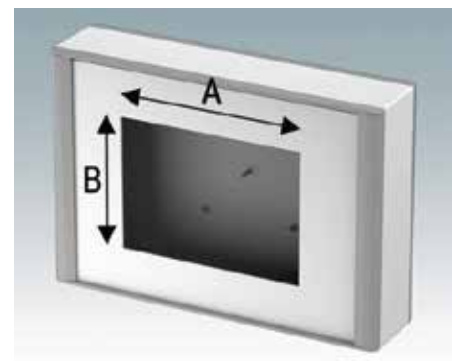

### Customising Options:

We can supply the front panels pre-punched with the required apertures for the displays as detailed above. Plus, additional cutouts for buttons and other controls, and digital printing of legends and logos. TECHNOMET-CONTROL enclosures can be customised to any height, width or depth.

### Enclosure mounting options:

VESA mounting | wall mounting | pole mounting.